DMI-2 portable

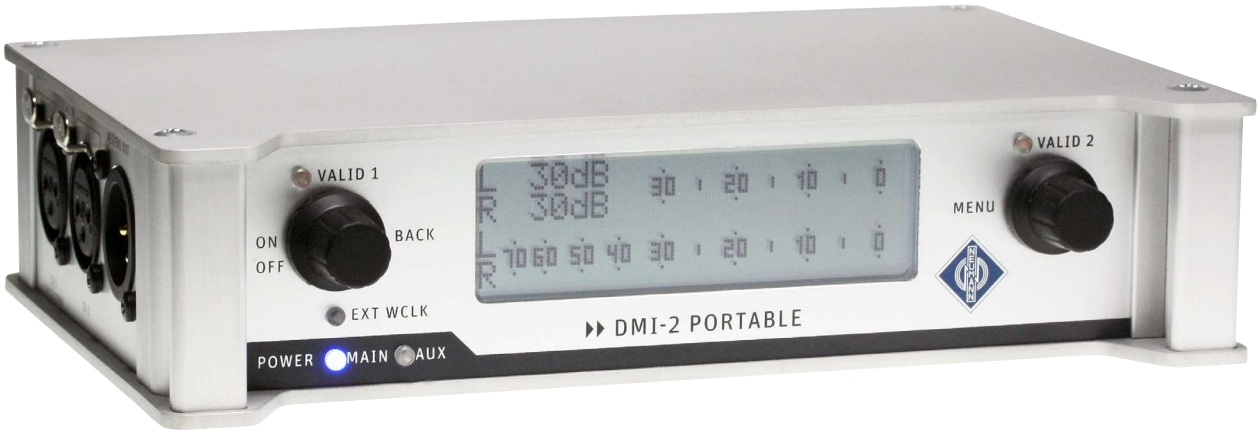

Key features

- Menu-driven control of digital microphones, with a data display and push-switch rotary encoders
- Direct access to Low Cut, PreAtt and Gain
- Upload of 8 complete microphone presets stored in the DMI-2 portable
- Remote Control Software RCS for PC/Mac, to control digital microphones and define presets
- Synchronizing the microphones with the DMI-2 portable Word Clock (AES42 Mode 2) or internal Word Clock
- Supporting all standard sampling rates: 44.1 / 48 / 88.2 / 96 / 176.4 / 192 kHz

Application

- ENG and other field recording applications

Technical Data

Dimensions:

- 186 x 44x 126 mm

Indicators:

- Monochrome display, bar graphs for Gain Level and Gain Reduction
- LEDs for Power, Battery status, Synchronization and Valid

Power supply:

- 2x DC 10...18 V (Hirose)
- External mains (e.g. Sound Devices XL-WPH3)

Ports:

- 2x AES42 IN (XLR3F)
- 1x AES/EBU OUT (XLR3M)
- 2x Word Clock IN/OUT (BNC)
- 1x Remote Control (USB)

Errors excepted, subject to changes · Printed in Germany · Publ. 03/11